

MultiPlus-II Inverter/Charger 4k5 & 6k5 GX

230V



MultiPlus-II6k5 GX

New models: more power per kg and per dm³, and better high temperature performance

A MultiPlus-II with LCD and GX functionality

The MultiPlus-II GX integrates a MultiPlus-II inverter/charger and a GX device with a 2x 16 character display.

Display and WiFi

The display reads battery inverter and solar charge controller parameters.

The same parameters can be accessed with a smartphone or other WiFi enabled device.

GX device

The integrated GX device includes


- ABMS-Can interface. This can be used to connect to a compatible CAN-bus managed battery. Note that this is not a VE.Can compatible port.
- A USB port.
- An Ethernet port
- A VE.Direct port.

Applications

The MultiPlus-II GX is intended for applications where additional interfacing with other products and/or remote monitoring is required, such as on-grid or off-grid energy storage systems and certain mobile applications.


Parallel and three phase operation

Only one GX unit is needed in case of Parallel and three phase operation.

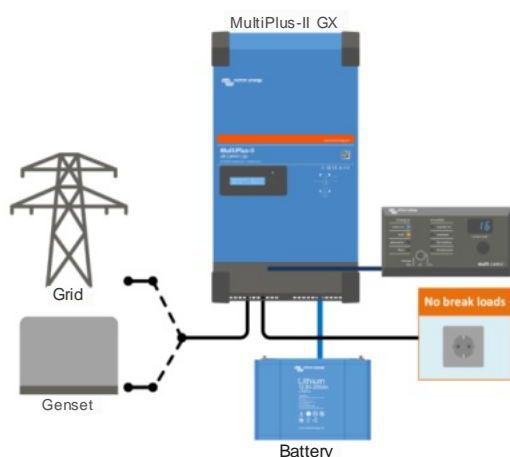


Standard marine, mobile or off-grid application

Loads that should shut down when AC input power is not available can be connected to a second output (not shown). These loads will be taken into account by the PowerControl and PowerAssist function in order to limit AC input current to a safe value when AC power is available.

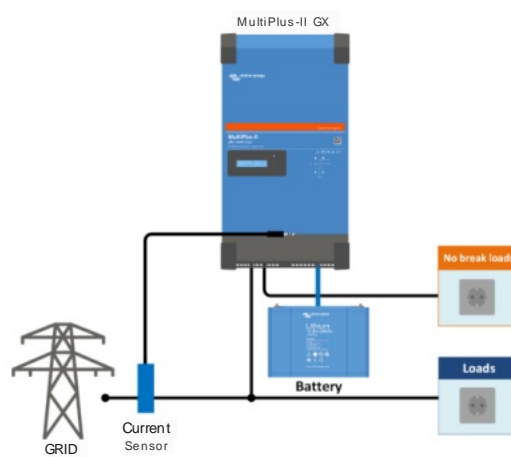


Standard mobile or off-grid application with external current sensor
Maximum current sensing range: 50 A resp 100 A

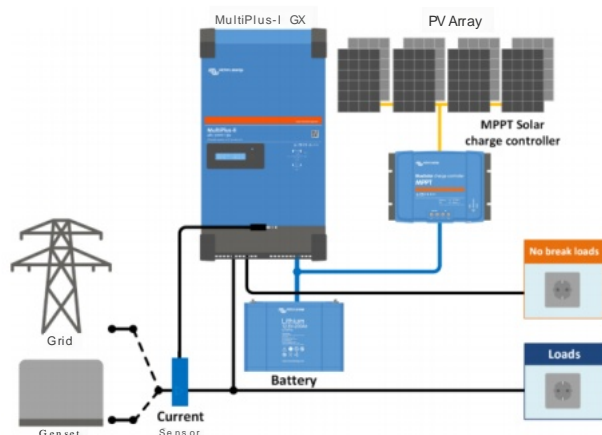

Grid parallel topology with MPPT solar charge controller

The MultiPlus-II will use data from the external AC current sensor (must be ordered separately) or power meter to optimise self-consumption and, if required, to prevent grid feed. In case of a power outage, the MultiPlus-II will continue to supply the critical loads.

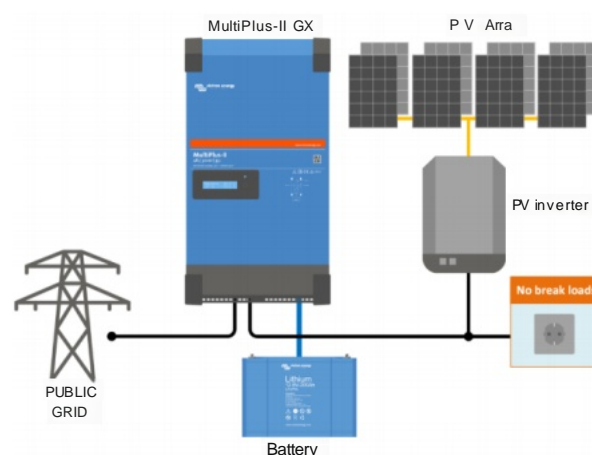

Grid in-line topology with PV inverter

PV power is directly converted to AC. The MultiPlus-II will use excess PV power to charge the batteries or to feed power back into the grid, and will discharge the battery or use power from the grid to supplement a shortage of PV power. In case of a power outage, the MultiPlus-II will disconnect the grid and continue to supply the loads.



VRM Portal

Our free remote monitoring website (VRM) will display all system data in a comprehensive graphical format. System settings can be changed remotely via the portal. Alarms can be received by e-mail or push notification.



VRM app

Monitor and manage your Victron Energy system from your smart phone and tablet. Available for both iOS and Android.



GX GSM

A cellular modem; providing a mobile internet for the system and connection to Victron Remote Management (VRM). Optional: outdoor GSM antenna and GPS antenna. For more detail please enter GX GSM in the search box on our website



Connection Area



Current sensor 100 A:50 mA

To implement PowerControl and PowerAssist and to optimize self-consumption with external current sensing. Maximum current: 50 A resp. 100 A. Length of connection cable: 1 m.



Digital Multi Control Panel

A convenient and low-cost solution for remote monitoring, with a rotary knob to set PowerControl and PowerAssist levels.

| MultiPlus-II GX230V | 48/4k5/55-32 | 48/6k5/100-50 |
|---|---|-----------------------------|
| PowerControl & PowerAssist | Yes | |
| Transfer switch | 32 A | 50 A |
| Maximum AC input current | 32 A | 50 A |
| INVERTER | | |
| DC Input voltage range | 38 – 60 V | |
| Output | 230 V ±2 % | 50 Hz ± 0.1% ⁽¹⁾ |
| Cont. output power at 25 °C | 4 kW | 6 kW |
| Cont. output power at 40 °C | 3,7 kW | 5,7 kW |
| Cont. output power at 65 °C | 3 kW | 4,6 kW |
| Time-limited power 1 (cold start) | 4,5 kW/2h | 6,5 kW/4h |
| Time-limited power 2 (cold start) | 6 kW/25min | 8 kW/1h |
| Max apparent feed-in power | 4 kW | 6 kW |
| Peak power | 7 kW/1min | 11 kW/1min |
| Maximum efficiency | 95 % | 96 % |
| Zero load power | 20 W | 28 W |
| Zero load power in AES mode | 13 W | 18 W |
| Zero load power in Search mode | 8 W | 8 W |
| CHARGER | | |
| AC Input voltage range | 187-265 V | |
| AC Input frequency range | 45 – 65 Hz | |
| Charge voltage 'absorption' | 57,6 V | |
| Charge voltage 'float' | 55,2 V | |
| Storage mode | 52,8 V | |
| Max. battery charge current at 25 °C | 55 A | 100 A |
| Max. battery charge current at 40 °C | 50 A | 95 A |
| Battery temperature sensor | Yes | |
| Compatible battery chemistries | Lithium, Lead-acid, Zinc-Bromine and more ⁽³⁾ | |
| GENERAL | | |
| Auxiliary output | Yes (32 A) | |
| Interfaces | BMS-Can, USB, Ethernet, VE.Direct, Wi-Fi | |
| External AC current sensor (optional) | 50 A or 100 A | |
| Programmable relay ⁽⁴⁾ | Yes | |
| Protection ⁽²⁾ | a–g | |
| VE.Bus communication port | For parallel and three-phase operation, remote monitoring and system integration | |
| General-purpose communication port | Yes, 2x | |
| Remote on-off | Yes | |
| Operating temperature range | -40 to +65 °C (fan-assisted cooling) | |
| Maximum humidity (non-condensing) | 95 % | |
| Maximum altitude | 2000 m | |
| ENCLOSURE | | |
| Material & Colour | Steel, blue RAL 5012 | |
| Protection category | IP21 | |
| Battery-connection | M8 bolts | |
| 230 V AC connection | Screw terminals 13 mm² (6 AWG) | |
| Weight | 21,4 kg | 29 kg |
| Dimensions (h x w x d) | 590 x 275 x 149 mm | 644 x 320 x 150 mm |
| STANDARDS | | |
| Safety | EN-IEC 60335-1, EN-IEC 60335-2-29, EN-IEC 62109-1, EN-IEC 62109-2 | |
| Emission, Immunity | EN 55014-1, EN 55014-2 EN-IEC 61000-3-2, EN-IEC 61000-3-3 IEC 61000-6-1, IEC 61000-6-2, IEC 61000-6-3 | |
| Uninterruptible power supply | Certification pending | |
| Anti-islanding | Certification pending | |
| 1) Can be adjusted to 60 Hz 2) Protection key: a) output short circuit b) overload c) battery voltage too high d) battery voltage too low e) temperature too high f) 230 VAC on inverter output g) input voltage ripple too high 3) Other chemistries are possible as well, providing the charger is configured according to the battery manufacturer's specification. 4) Programmable relay which can be set for general alarm, DC under voltage or genset start/stop function. AC rating: 230 V / 4 A, DC rating: 4 A up to 35 VDC and 1 A up to 60 VDC. | | |

- 1) Can be adjusted to 60 Hz
- 2) Protection key:
 - a) output short circuit
 - b) overload
 - c) battery voltage too high
 - d) battery voltage too low
 - e) temperature too high
 - f) 230 VAC on inverter output
 - g) input voltage ripple too high

- 3) Other chemistries are possible as well, providing the charger is configured according to the battery manufacturer's specification.
- 4) Programmable relay which can be set for general alarm, DC under voltage or genset start/stop function.
AC rating: 230 V / 4 A, DC rating: 4 A up to 35 VDC and 1 A up to 60 VDC.